




CB016F001A(RA-277) Assembly Instructions

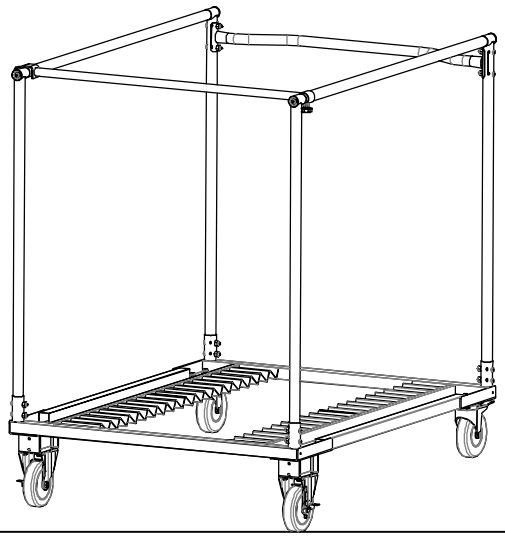


PART LIST


PART	DESCRIPTION	DRAWING	Q'TY
A	Base		1
B	Support pole		2
C	Back pole		2
D	Upper tube		2
E	Armrest		1
F	Adjustable cross tube		1
G	Heighten pad		2
H	Fixed-direction wheel with brake(5")		2
I	Swivel wheel with brake(5")		2
J	Adjustable bolt		2
K	Steel washer		4
L	Bolt(M8*73)		8
M	Bolt(M6*42)		12
N	Bolt(M6*25)		4
O	Bolt(M8*20)		8
P	Steel washer(1.5*8.5*21)		32
Q	End cup nut(M6)		12
R	Nut(M8)		16
S	Spanner(10*13)		1
T	Allen wrench(4MM)		1
U	Spanner (103*78*13mm)		1

Step 1:
At the front of Base , see arrow assigned.
(a) put P on L firstly , assemble H×1pc with L&P×4pcs,through G 1pc,another P×4pcs×R ×4pcs to A.
(b) Repeat step (a) assemble two wheels to base.

Step 2:
At the back of Base , see arrow assigned.
(a) Put P on O firstly , assemble I×1pc with O&P×4pcs , another P×4pcs ×R×4pcs to A.
(b) Repeat step (a) , assemble two wheels to base.

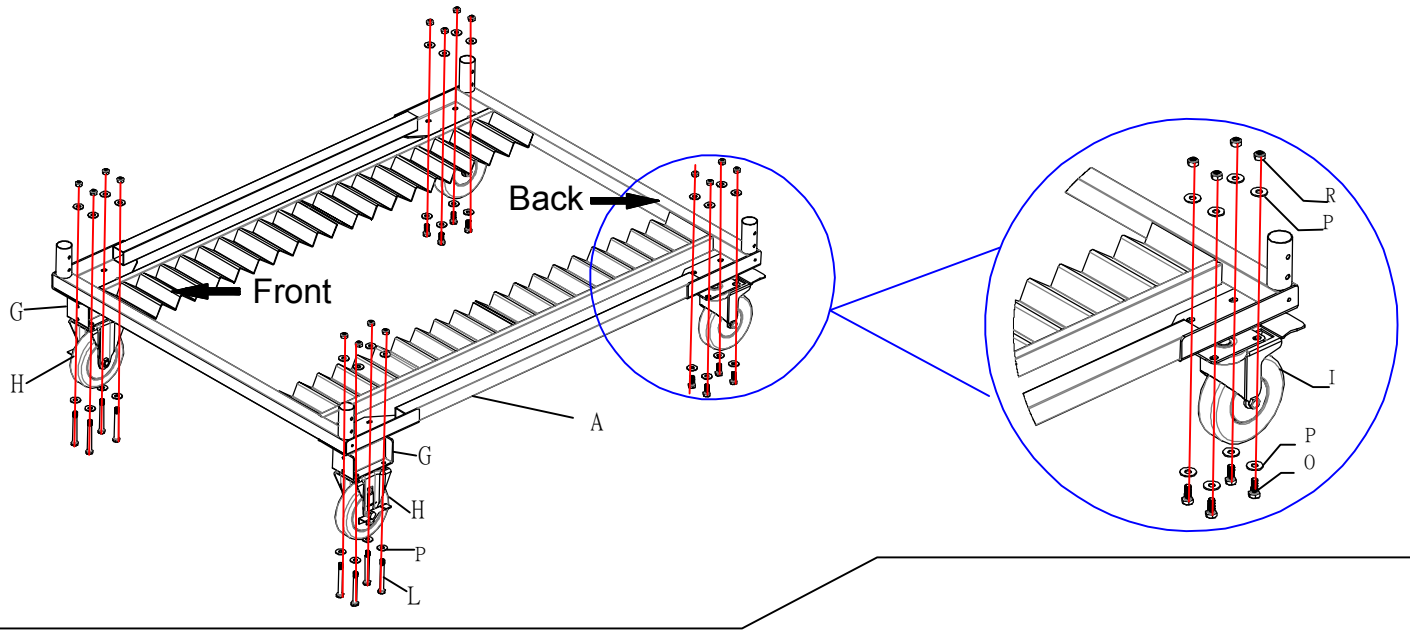

Step 3:
(a)Insert C×2pcs to sleeve tube above H on A , assemble C×2pcs to A with K×4pcs×Q×4pcs.
(b)Insert B×2pcs to sleeve tube above I on A , assemble C×2pcs to A with M×4pcs×Q×4pcs.

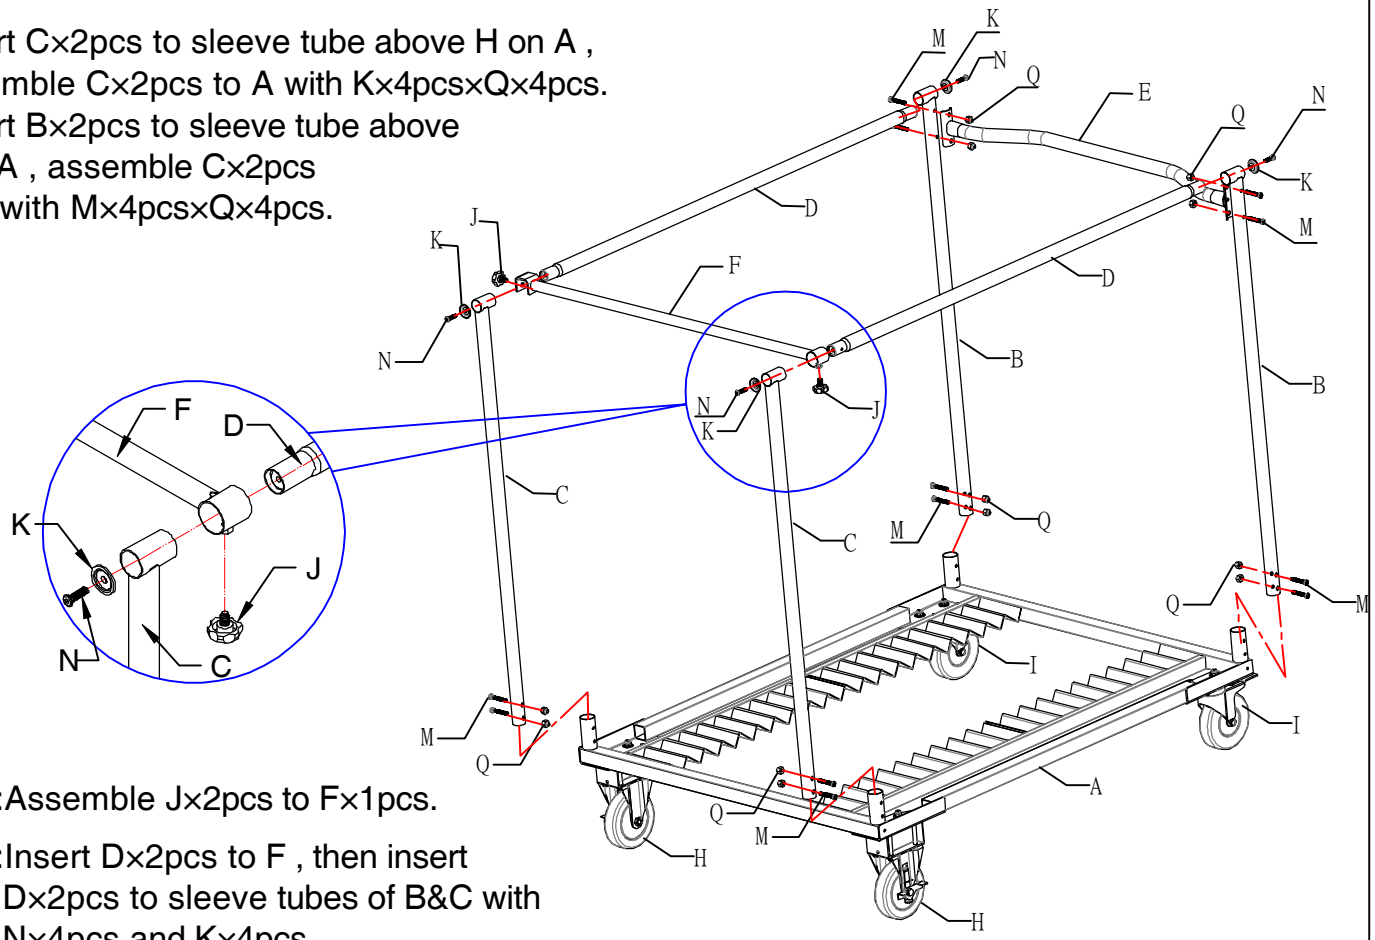

Step 4:Assemble J×2pcs to F×1pcs.

Step 5:Insert D×2pcs to F , then insert D×2pcs to sleeve tubes of B&C with N×4pcs and K×4pcs.

Step 6:Assemble E with M×4pcs and Q×4pcs.